



LEE-165W

Lättvikts flexibel Solpanel



Mått 680*1350*4mm , 165W-20Volt

SBL Power Supply

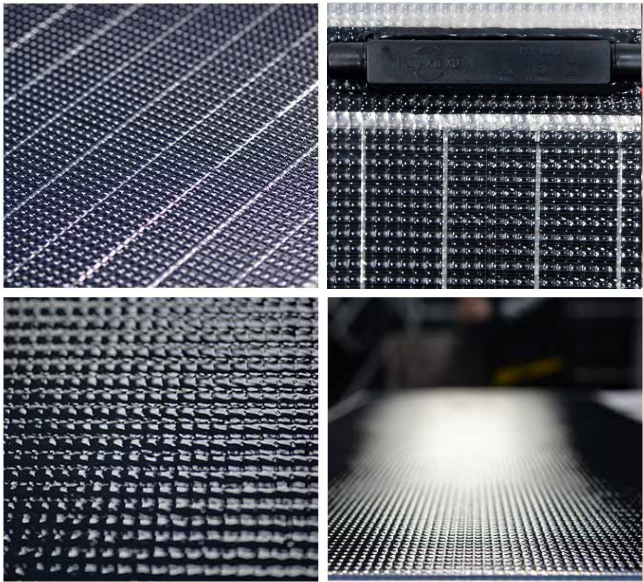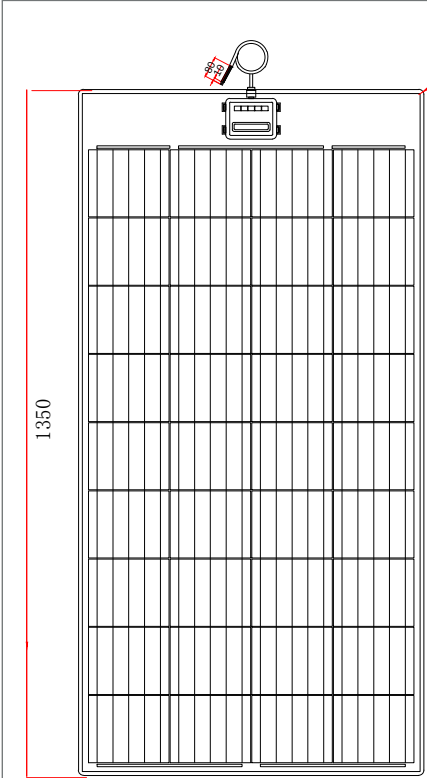

Detaljer


165W20V(+) 680*1350*4

Data

Maximum power(Pmax)	200W
Open-circuit voltage(Voc)	23.6
Voltage at Pmax(Vmp)	20.0
Short-circuit current(Isc)	10.6
Current at Pmax(Imp)	10.0
Cells Efficiency(%)	22.42%
The maximum system voltage	200VDC(IEC)
Power temperature coefficient	-0.43%/°C
Voltage temperature coefficient	-0.34%/°C
Current temperature coefficient	0.05%/°C
Output power tolerance	±3%
Operating Temperature	-20~75°C

Specifikationer

Solar cell brand	A grade solar cells
No.of cells and connections	36(4*9)
Module dimension	680*1350*4mm
Waterproof junction box	IP65/IP67
Garanti	1 år

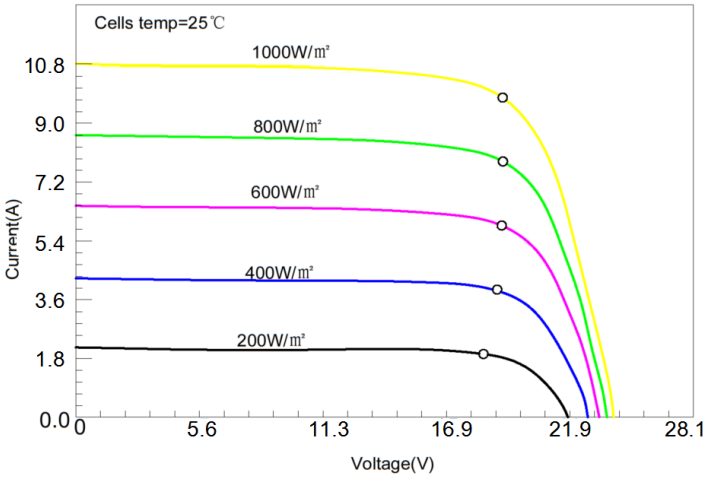

SBL Power Supply